

THE HIGHLY CUSTOMIZABLE, ALL-TERRAIN, PERSONNEL & EQUIPMENT CARRIER

Sold & distributed by:



KODIAK K6

12,000 lbs payload

134 HP

18" ground clearance

24" tracks



UNMATCHED TRACTION & SUSPENSION



1 OR 2 PERSON CAB
OPEN OR CLOSED


CUSTOMIZED FOR ANY INDUSTRY



FLATBED



DUMPER

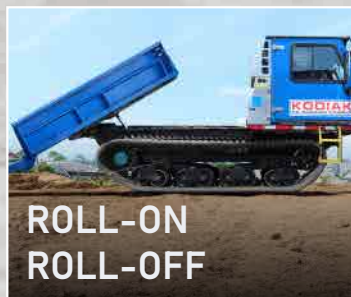



ROLL-ON
ROLL-OFF



PERSONNEL
CARRIER



WWW.TRACKINC.COM | INFO@TRACKINC.COM | 844-846-7958

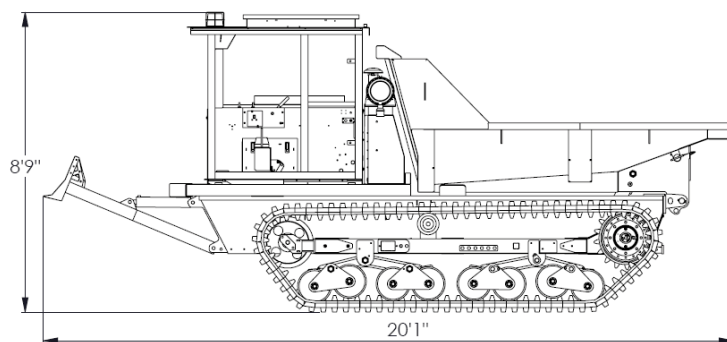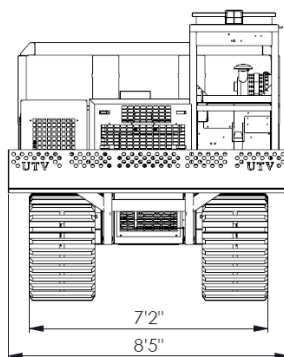

DIMENSIONS / WEIGHT		FRAME / SUSPENSION			
Overall length	241" with plow and dump box	Type	Corten Welded Tub		
Overall width	101" with plow 96" without plow & mirrors	Suspension system :	<ul style="list-style-type: none"> ➤ Patented walking beam with double twin rocker bogey wheel suspension ➤ 2 independent idler wheels with oil bath hubs and steel face seals ➤ 2 rear drive sprockets ➤ 16 steel wheels, 12" dia 		
Overall height	105"	POWER TRAIN FOR HYDROSTATIC DRIVE			
Fording depth	29"	Transmission	Hydrostatic, 2-speed		
Ground clearance	18"	Service Brakes	Positive deceleration through the hydrostatic transmission		
Weight	12,000 lbs, base vehicle	Parking brakes	Multi-Disc, spring applied & pressure released		
Payload	12,000 lbs, max	ELECTRICAL			
GVWR	24,000 lbs, max	Voltage	12 V		
PERFORMANCE		(2) batteries, capacity	1,000 CCA		
Maximum speed	8 mph loaded	Alternator Capacity	120 Amps		
Inside turning radius	0 ft	Ground	Negative		
Ground pressure (6" penetration)	2.33 PSI unloaded 4.98 PSI loaded	TRACKS			
Maximum gradeability	Static test when loaded	One piece 24" rubber tracks with steel reinforcements			
- Uphill	35°(70%) continuous	TRACK TENSIONING			
- Side-hill	15°(27%)	Active track tensioning system maintains track tension while negotiating variable terrain			
Normal driving range	12 hours	STEERING			
ENGINE		Independent dual joysticks or available steering wheel			
Make	Deutz AG Tier 4	STANDARD FEATURES			
Model	TCD 3.6 L4, 4 cylinder Turbo charged diesel				
Horsepower	134 HP at 2,300 RPM				
Torque	369 ft lbs at 1,600 RPM				
Displacement	3.6 liters				
Fuel capacity	50 gals				
DEF tank	2.6 gals				
Cooling system	4.0 gals				
1-Man open cab ROPS certified				12v primary fuel filter heater, secondary fuel filter with water separator	
Roll Over Protection Structure ISO 3471:2008				Electronic engine protection system	
Vinyl seat with mechanical suspension		Hydraulic oil cooler			
2-point seat belt		Fire extinguisher			
Full instrumentation, illuminated panel gauge		Backup alarm and horn			
High powered LED lights: 2 front & 1 rear on cab, 1 strobe on top		Driver's side deck ladder			
120v block heater, muffler, glow plugs		1 set of operations, parts & service manuals			
		Standard one-year warranty			

*Specifications subject to change without notice.

